



HD 2259.2 BENCH-TOP DISSOLVED OXYGEN AND pH METER

The **HD2259.2** a bench top instrument for electrochemical measures: **pH**, **dissolved oxygen**, and **temperature**. It is fitted with a large backlit LCD display. The **HD2259.2** measures **pH**, **mV**, **redox potential** (ORP) with pH, redox electrodes or electrodes with separate reference; the **concentration of dissolved oxygen** in liquids (in mg/l), and **saturation index** (in %), using SICRAM combined probes of polarographic type with two or three electrodes and integrated temperature sensor.

The instrument fitted with an input for the measurement of **temperature** with Pt100 or Pt1000 immersion, penetration or contact probes. The temperature probes are equipped with an automatic recognition module and factory calibration data are stored inside.

- The pH electrode calibration can be carried out on one or five points and the calibration sequence can be chosen from a list of 13 buffers Temperature compensation can be automatic or manual.
- The dissolved Oxygen probe's quick calibration function guarantees timely correctness of the performed measurements.
- Conductivity, dissolved oxygen and temperature probes fitted with SICRAM module can store factory and calibration data inside.

The instrument HD2259.2 is a **datalogger**, it can memorize up to 2,000 samples of data:

- pH or mV, concentration of dissolved oxygen or saturation index and saturation index and temperature:
- pH or mV, conductivity or resistivity or TDS or salinity, concentration of dissolved oxygen and temperature:

The data can be transferred from the instrument connected to a PC via the multi-standard RS232C serial port and USB 2.0. The storing parameters can be configured using the menu. The RS232C serial port can be used to transfer the acquired measurements to a 24 column portable printer in real time (S'print-BT).

The instruments equipped with **HD22BT** (Bluetooth) option can transfer data without any connection to a PC or printer fitted with Bluetooth input or through Bluetooth/RS232C converter. The software DeltaLog11 allows instrument management and configuration, and data processing on PC.

The instruments have IP66 protection degree.

Technical characteristics HD2259.2

pH - mV - mg/l O₂ - %O₂ - mbar - °C - °F measurement

Instrument

Dimensions (Length x Width x Height)	265x185x70mm
Weight	490g
Materials	ABS, rubber
Display	Back lighted, matrix point display. 240x64 points, visible area: 128x35mm

Operating conditions

Working temperature	-5 ... 50°C
Storage temperature	-25 ... 65°C
Working relative humidity	0 ... 90% R.H. without condensate

Protection degree

IP66

Power

Mains adapter (cod. SWD10)
12Vdc/1A

Auxiliary socket

For supplying of electrode holder with built-in stirrer HD22.2


Security of memorized data

Unlimited

Time

Date and hour

Real time schedule with backup battery E 3.6V - 1/2AA

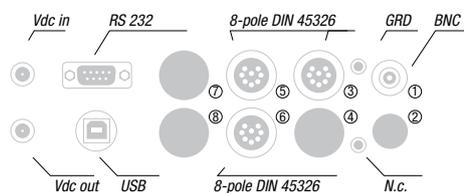

Accuracy	1 min/month max drift
<i>Measured values storing</i>	
Quantity	2000 screens
Storage interval	1 s ... 999 s
<i>Calibration storage</i>	
Quantity	Last 8 calibrations of each physical quantity
<i>RS232C serial interface</i>	
Type	RS232C electrically isolated
Baud rate	Can be set from 1200 to 115200 baud
Data bit	8
Parity	None
Stop bit	1
Flow Control	Xon/Xoff
Length of serial cable	Max 15m
<i>USB Interface</i>	
Type	1.1 - 2.0 electrically isolated
<i>Bluetooth Interface</i>	
	optional
<i>Connections</i>	
Input for temperature probes with SICRAM modules [Ⓢ]	8-pole male DIN45326 connector
pH/mV inputs ^①	BNC female
Input SICRAM module	8-pole male DIN45326 connector
pH/temperature probes ^③	
Input dissolved oxygen [Ⓢ]	8-pole male DIN45326 connector
Serial interface	DB9 connector (9-pole male)
USB interface	USB connector type B
Bluetooth	Optional
Mains adapter	2-pole connector (Ø5.5mm-2.1mm). Positive at centre
Outlet for power supply of electrode holder with built-in magnetic stirrer	2-pole connector (Ø5.5mm-2.1mm). Positive at centre (output 12Vdc/200mA max).

Measurement of pH by instrument

Measuring range	-9.999...+19.999pH
Resolution	0.01 or 0.001pH selectable from menu
Accuracy	.001pH ±1 digit
Input impedance	10offset > 20mV
Calibration error @25°C	Slope > 63mV/pH or Slope < 50mV/pH
	Sensitivity < 85% or sensitivity < 85%
Calibration points	Up to 5 points with 13 automatically detected buffer solutions
Automatically detected pH standard solutions (@25°C)	1.679pH - 2.000pH - 4.000pH - 4.008pH 4.010pH - 6.860pH - 6.865pH - 7.000pH 7.413pH - 7.648pH - 9.180pH - 9.210pH 10.010pH

mV measurement by instrument

Measuring range	-1999.9...+1999.9mV
Resolution	0.1mV
Accuracy	±0.1mV ±1 digit
Drift after 1 year	0.5mV/year

Measurement of dissolved oxygen by instrument

Resolution	0.01mg/l
Measuring range	0.00...90.00mg/l
Accuracy	±0.03mg/l±1 digit (60...110%, 1013mbar, 20...25°C)

Measurement of saturation index of dissolved oxygen

Measuring range	0.0...600.0%
Resolution	0.1%
Accuracy	±0.3% ±1 digit (in the range 0.0...199.9%) ±1% ±1 digit (in the range 200.0...600.0%)

Automatic temperature compensation

0...50°C

Measurement of barometric pressure

Measuring range	0.0...1100.0mbar
Resolution	0.1mbar
Accuracy	±2mbar±1 digit between 18 and 25°C ±(2mbar+0.1mbar/°C) in the remaining range

Salinity setting

Setting	directly from menu or automatically by conductivity measurement
Setting range	0.0...70.0g/l
Resolution	0.1g/l

Temperature measurement with the sensor inside the dissolved oxygen probe

Measuring range	0.0...50.0°C
Resolution	0.1°C
Accuracy	±0.1°C
Drift after 1 year	0.1°C/year

Measurement of temperature by instrument

Pt100 measuring range	-50...+150°C
Pt1000 measuring range	-50...+150°C
Resolution	0.1°C
Accuracy	±0.1°C ±1 digit
Drift after 1 year	0.1°C/year

ORDERING CODES

HD2259.2: The kit is composed of: instrument HD2259.2 for the measurement of pH - redox - concentration of dissolved oxygen, saturation index - temperature, **datalogger**, stabilized power supply at mains voltage 100-240Vac/12Vdc-1A., calibrator HD9709/20, instructions manual and software DeltaLog11.


pH/mV electrodes, conductivity probes, dissolved oxygen probes, temperature probes, standard reference solutions for different measurement types, connection cables for pH electrodes with S7 connector, cables for data download to PC or printer have to be ordered separately.

ACCESSORIES

- 9CPRS232:** Connection cable SubD female 9-pole for serial output RS232C.
- CP22:** USB 2.0 connection cable - connector type A - connector type B.
- DeltaLog11:** Software for download and management of the data on PC using Windows 98 to Vista operating systems.
- SWD10:** Stabilized power supply at 100-240Vac/12Vdc/1A mains voltage.
- HD40.1:** Portable, serial input, 24 column thermal printer, 57mm paper width.
- HD40.2:** 24-column portable thermal printer, **Bluetooth and serial interface**, 57mm paper width, four NiMH 1.2V rechargeable batteries, SWD10 power supply, instruction manual, 5 thermal paper rolls. Requires the module HD22BT (**optional**) or the cable HD 2110 CSNM (**optional**).
- HD2110CSP:** Connection cable for instruments series HD34... to printer **S'print-BT**
- HD22.2:** Laboratory electrode holder composed of basis plate with incorporated magnetic stirrer, staff and replaceable electrode holder. Height max. 380mm. Powered by bench-top meters of the series HD22... with cable HD22.2.1 (**optional**) or supplier SWD10 (**optional**).
- HD22.3:** Laboratory electrode holder with metal basis plate. Flexible electrode holder for free positioning. For Ø 12mm probes.
- HD22BT:** Bluetooth module for wireless data transmission from instrument to PC. **The fitting of the module into the instrument is made exclusively by Delta Ohm, at the time of placing the order.**



pH

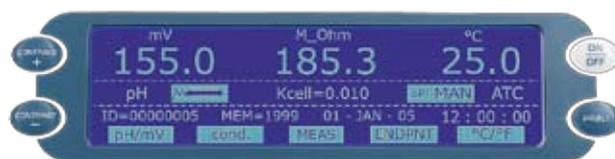

mg/l

TP47: Module for the connection of Pt100 4-wire and Pt1000 2-wire probes.

Accessories

pH electrodes without SICRAM module (Inputs ① and ②)

KP20: Combined pH electrode for general use, gel filled with screw connector S7 body in Epoxy.

KP30: Combined pH electrode for general use, cable 1 m, gel filled, body in Epoxy.

KP50: Combined pH electrode with Teflon collar diaphragm, for emulsions, deionised water, S7 screw connector, gel filled, body in glass.

KP 61: Combined pH electrode, 3 diaphragms for milk, cream, etc. Liquid reference filling, with screw connector S7, body in glass.

KP 62: Combined pH electrode, 1 diaphragm for pure water, paints, etc. gel-filled, with screw connector S7, body in glass.

KP 63: Combined pH electrode for general use, varnish, cable 1 m, electrolyte KCl 3M body in glass.

KP 64: Combined pH electrode for water, varnish, emulsions, etc., electrolyte KCl 3M with screw connector S7, body in glass.

KP 70: Combined pH micro electrode diam. 4.5 x L=25 mm. Gel filled, with screw connector, body in glass.

KP 80: Combined pointed pH electrode, gel filled, with screw connector S7, body in glass.

KP100: Flat membrane gel combined pH electrode with S7 screw connector, glass body, for skin, leather, paper.

CP: Extension cable 1.5m with BNC connectors on one side and S7 on the other side for electrode with S7 connector.

pH electrodes with SICRAM module (Input ③)

KP63TS: Combined pH/temperature electrode with SICRAM module, body in Epoxy, Ag/AgCl sat KCl.

ORP Electrodes (Inputs ① and ②)

KP90: Redox Platinum electrode, with screw connector S7, electrolyte KCl 3M, body in glass.

KP91: Redox Platinum electrode with 1m cable, GEL filled, body in glass.

CP5: Extension cable 5m with BNC connectors on one side and S7 on the other side for electrode with S7 connector.

CE: S7 screw connector for pH electrode.

BNC: Female BNC for electrode extension.

SICRAM module with BNC input for pH electrodes (input ③)

KP47: Sicram module for pH electrode with standard BNC connector.

pH buffer solutions

HD8642: Buffer solution 4.01pH - 200cc.

HD8672: Buffer solution 6.86pH - 200cc.

HD8692: Buffer solution 9.18pH - 200cc.

Redox buffer solutions

HDR220: Redox buffer solution 220mV 0,5 l.

HDR468: Redox buffer solution 468mV 0,5 l.

Electrolyte solutions

KCL 3M: 50cc ready for use solution for electrode refilling.

Cleaning and maintenance

HD62PT: Diaphragm cleaning (thiourea in HCl) - 500ml.

HD62PP: Protein cleaning (pepsin in HCl) - 500ml.

HD62RF: Regeneration (fluorhydric acid) - 100ml.

HD62SC: Solution for electrode preservation - 500ml.

Combined dissolved oxygen/temperature probes (Input ⑥)

D09709 SS: The kit includes: combined probe for measurement of O₂ and temperature with replaceable membrane, three membranes, 50ml of zero solution, 50ml of electrolyte solution. Cable length 2m. Ø12mm x 120mm.

D09709 SS.5: The kit includes: combined probe for measurement of O₂ and temperature with replaceable membrane, three membranes, 50ml of zero solution, 50ml of electrolyte solution. Cable length 5m. Ø12mm x 120mm.

Accessories

D09709 SSK: Accessory kit for the D09709 SS probe consisting of three membranes, 50ml of zero solution, 50ml of electrolyte solution

D09709.20: Calibrator for polarographic probes D09709SS and D09709SS.5.

Temperature probes complete with SICRAM module (Input ⑤)

TP87: PT100 sensor immersion probe. Stem Ø 3 mm, length 70 mm. Cable length 1 metre.

TP472I.0: Pt100 sensor immersion probe. Stem Ø 3 mm, length 230 mm. Cable length 2 metres.

TP473P.0: Pt100 sensor penetration probe. Stem Ø 4mm, length 150 mm. Cable length 2 metres.

TP474C.0: Pt100 sensor contact probe. Stem Ø 4mm, length 230mm, contact surface Ø 5mm. Cable length 2 metres.

TP475A.0: Air probe, sensor Pt100. Stem Ø 4mm, length 230mm. Cable length 2 metres.

TP472I.5: Immersion probe, sensor Pt100. Stem Ø 6mm, length 500 mm. Cable length 2 metres.

TP472I.10: Immersion probe, sensor Pt100. Stem Ø 6mm, length 1,000mm. Cable length 2 metres.

Temperature probes complete with TP47 module (input ⑤)

TP47.100: Direct 4 wires Pt100 sensor immersion probe. Probe's stem Ø 3mm, length 230mm. Connection cable 4 wires with connector, length 2 metres.

TP47.1000: Pt1000 sensor immersion probe. Probe's stem Ø 3mm, length 230mm. Connection cable 2 wires with connector, length 2 metres.

TP87.100: Pt100 sensor immersion probe. Probe's stem Ø 3mm, length 70mm. 4 wire connection cable with connector, length 1 metre.

TP87.1000: Pt1000 sensor immersion probe. Probe's stem Ø 3mm, length 70mm. 2-wire connection cable with connector, length 1 metre.

Accessories

TP47: Module for the connection of Pt100 4-wire and Pt1000 2-wire probes.

