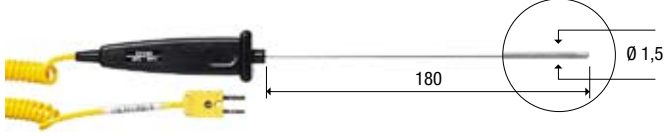


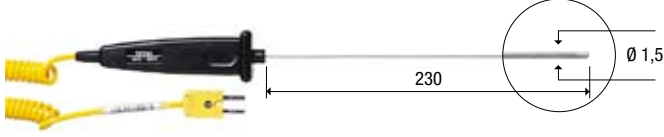
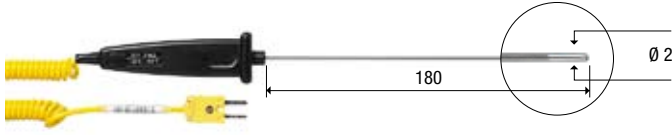

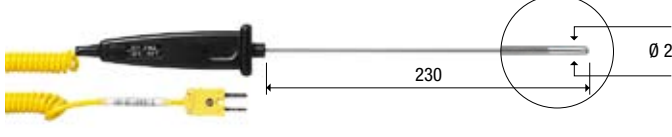
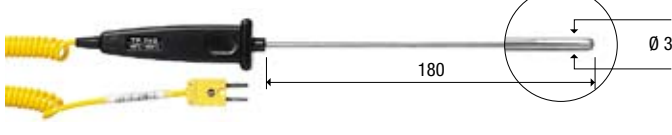
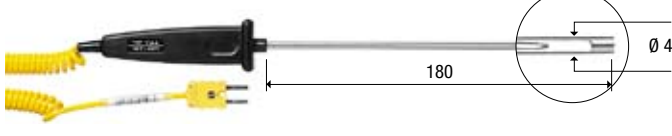



THERMOCOUPLE PROBES FOR PORTABLE INSTRUMENTS

TYPE "K" (CHROMEL - ALUMEL) THERMOCOUPLE PROBES

CODE	°C max	τ s	DIMENSIONS	USE
TP 741	800	2s		
TP 741/1	400	2s		
TP 741/2	800	2s		
TP 742	800	2s		
TP 742/1	400	2s		
TP 742/2	800	2s		
TP 743	800	3s		
TP 744	400	4s		

Temperature

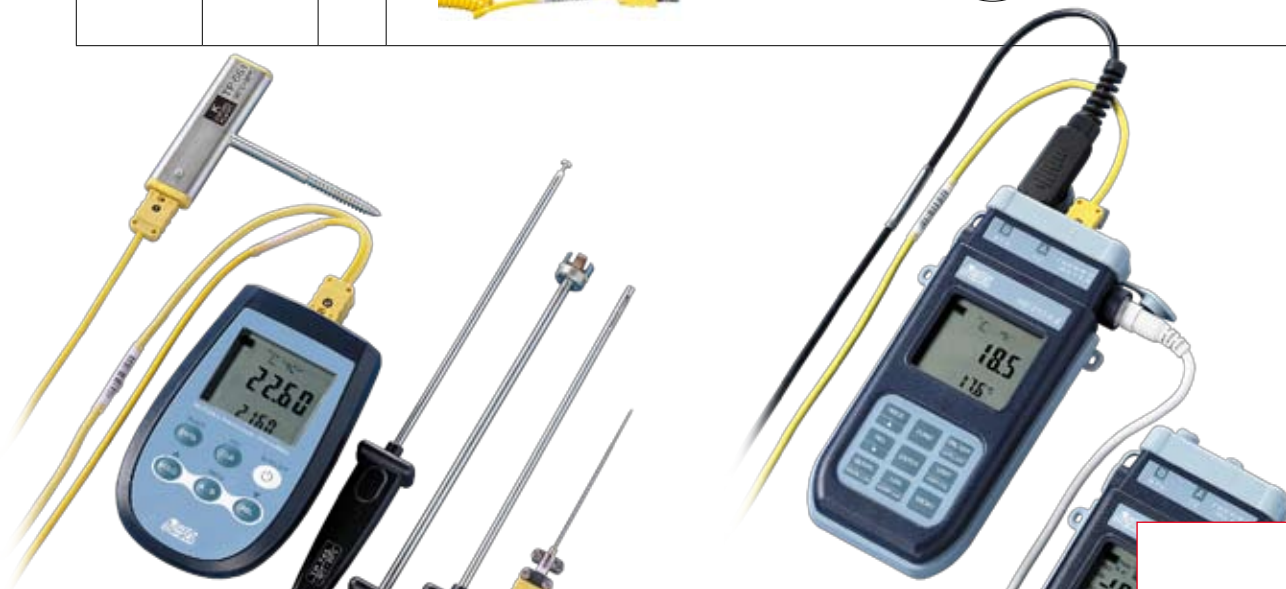
TYPE "K" (CHROMEL - ALUMEL) THERMOCOUPLE PROBES

CODE	°C max	τ s	DIMENSIONS	USE
TP 745	500	5s		
TP 746	250	2s		
TP 750	1000	3s		
TP 750.0	800	3s		
TP 751	200	2s		
TP 754	500	2s		
TP 754/9	500	2s		
TP 755	800	2s		
TP 755/9	800	2s		

TYPE "K" (CHROMEL - ALUMEL) THERMOCOUPLE PROBES

CODE	°C max	τ s	DIMENSIONS	USE
TP 756	200	2s		
TP 757	180	30s	MAGNETIC PROBE FOR CONTACT MEASURE ON MAGNETIC METALLIC SURFACES 	
TP 758	400	4s		
TP 758.1	400	4s		
TP 772	400	3s		
TP 774	250	2s		
TP 776	200	2s		
TP 777	200	3s		

Temperature



TYPE "K" (CHROMEL - ALUMEL) THERMOCOUPLE PROBES

CODE	°C max	τ s	DIMENSIONS	USE
TP 647	300	2s	<p style="text-align: center;">For SIT calibration up to 300°C.</p>	
TP 647/2	300	2s		
TP 647/3	300	2s		
TP 647/5	300	2s		
TP 651	1200	6s		
TP 652	1200	6s		
TP 655	180	2s		
TP 656	200	1s		
TP 656/1	1000	1s		
TP 656/2	1000	1s		
TP 657/1	100	5s		
TP 658	100	2s		

